

FIG. 1

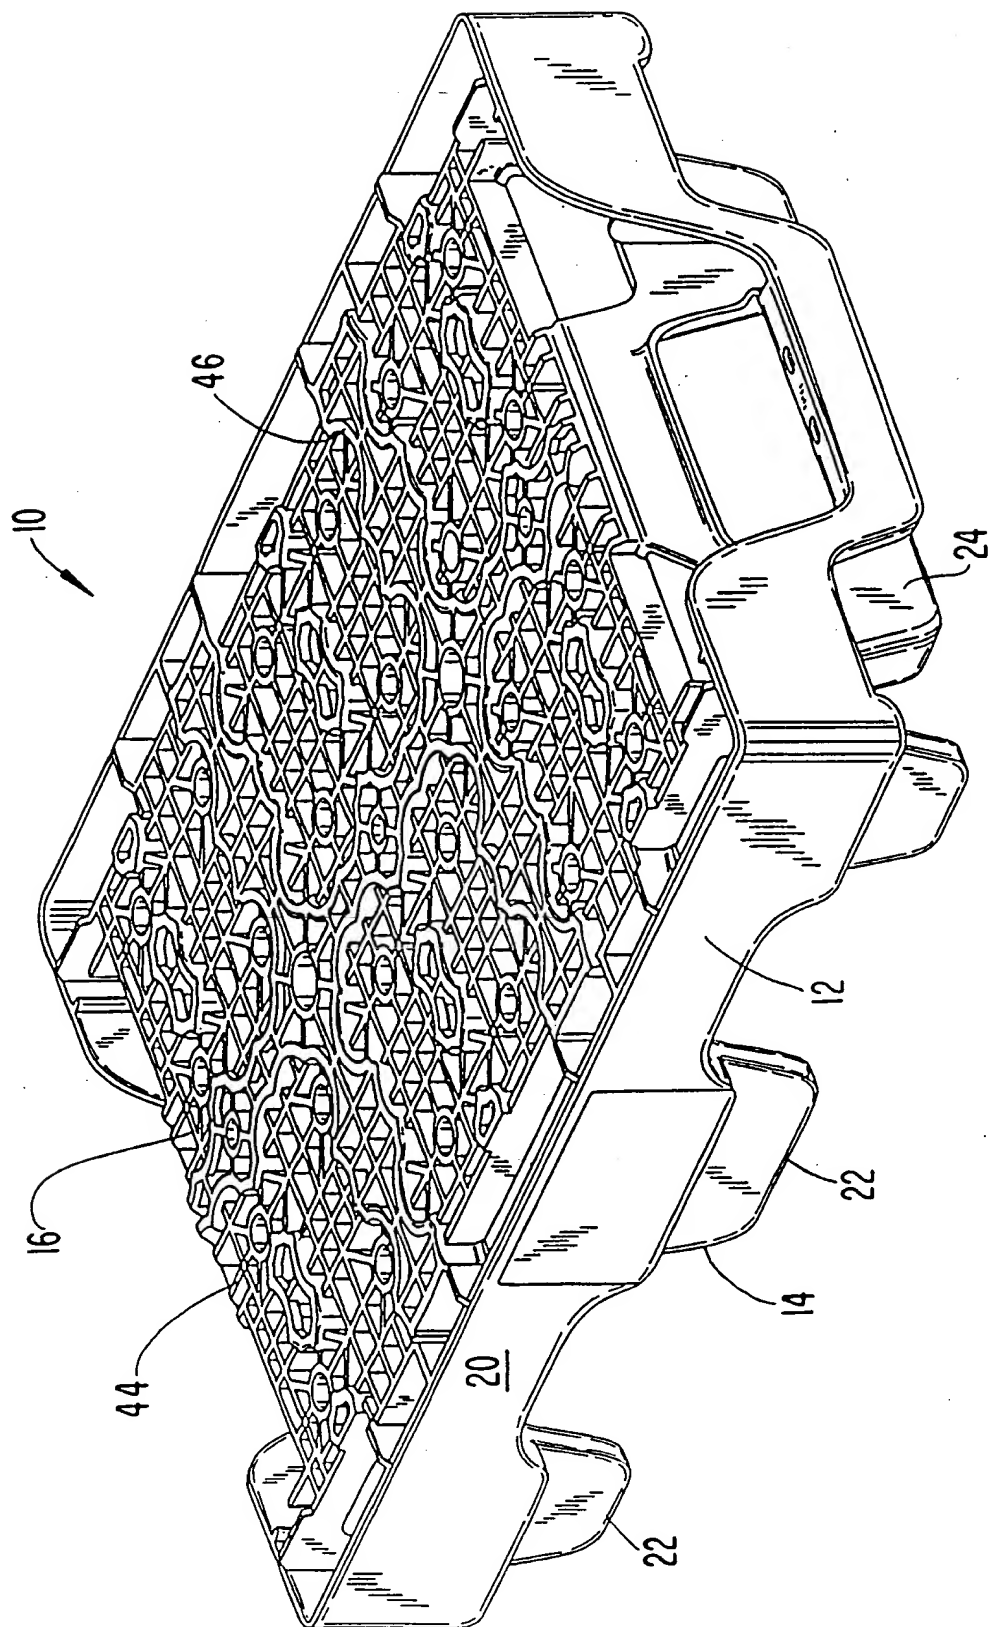


FIG. 2

FIG. 3 is a perspective view of the first embodiment of the present invention, showing a cross-section of a container with a lid and a base. The lid is shown in a partially open position, revealing the interior of the container. The base is shown in a partially open position, revealing the interior of the container. The lid and base are both made of a material that is resistant to heat and cold, and they are both designed to be easy to use. The lid and base are both made of a material that is resistant to heat and cold, and they are both designed to be easy to use.

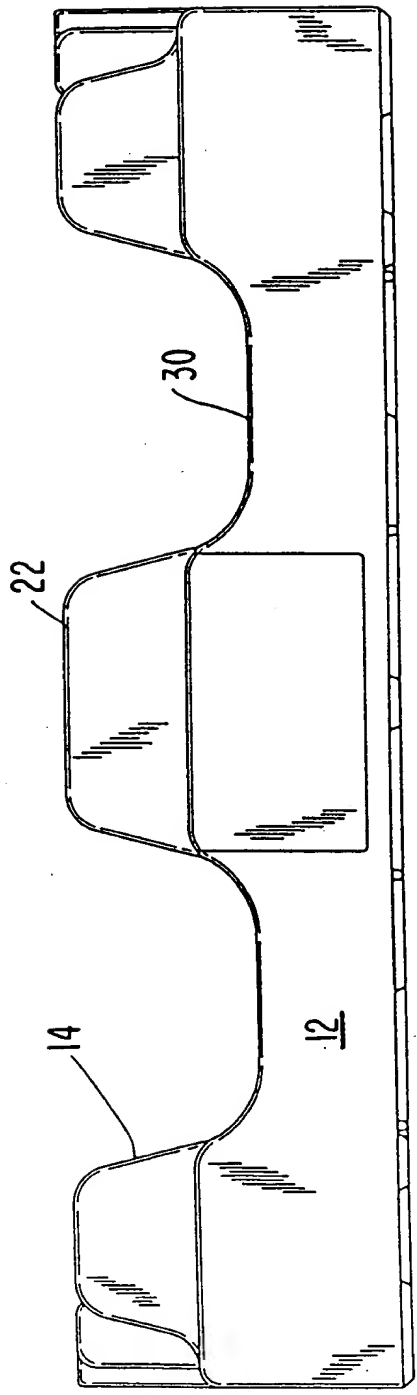


FIG. 3

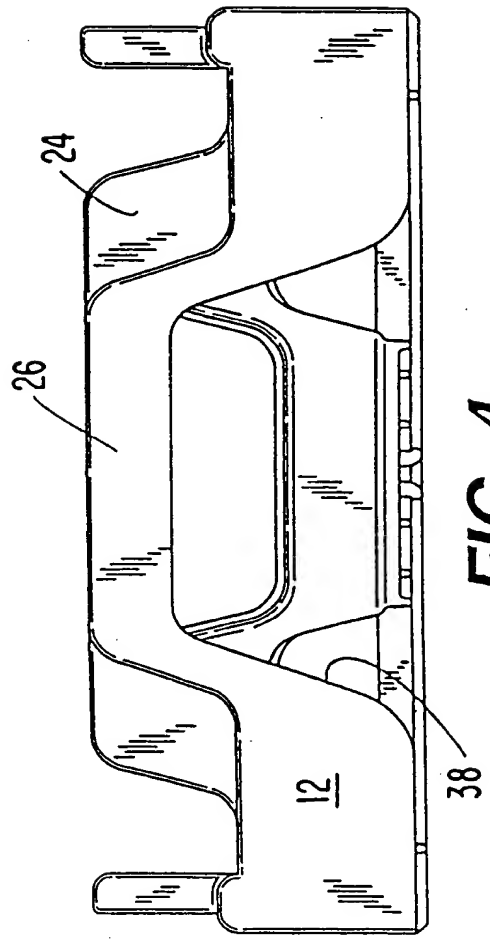


FIG. 4

FIG. 5 is a top view of the device of FIG. 1, showing the array of cells 10 and the peripheral frame 12.

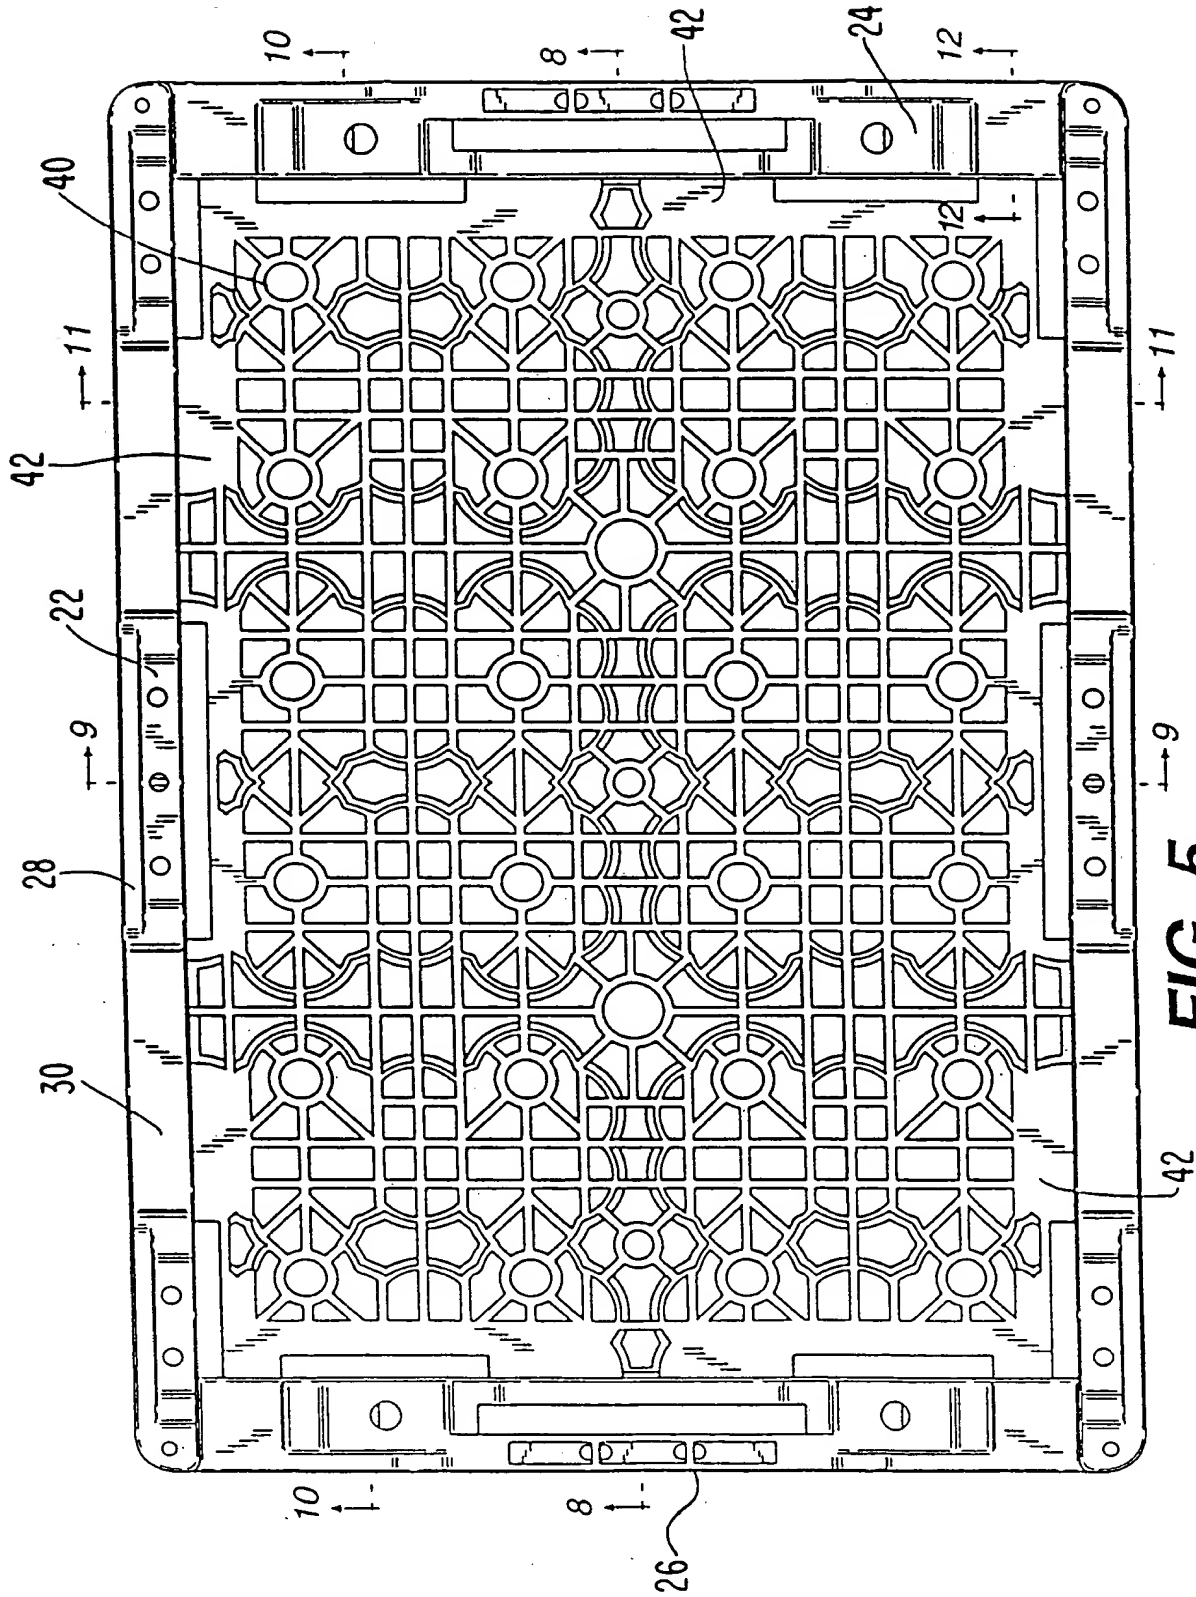


FIG. 5

FIG. 6 is a top view of the device 100 showing the grid 23 and the pattern 25.

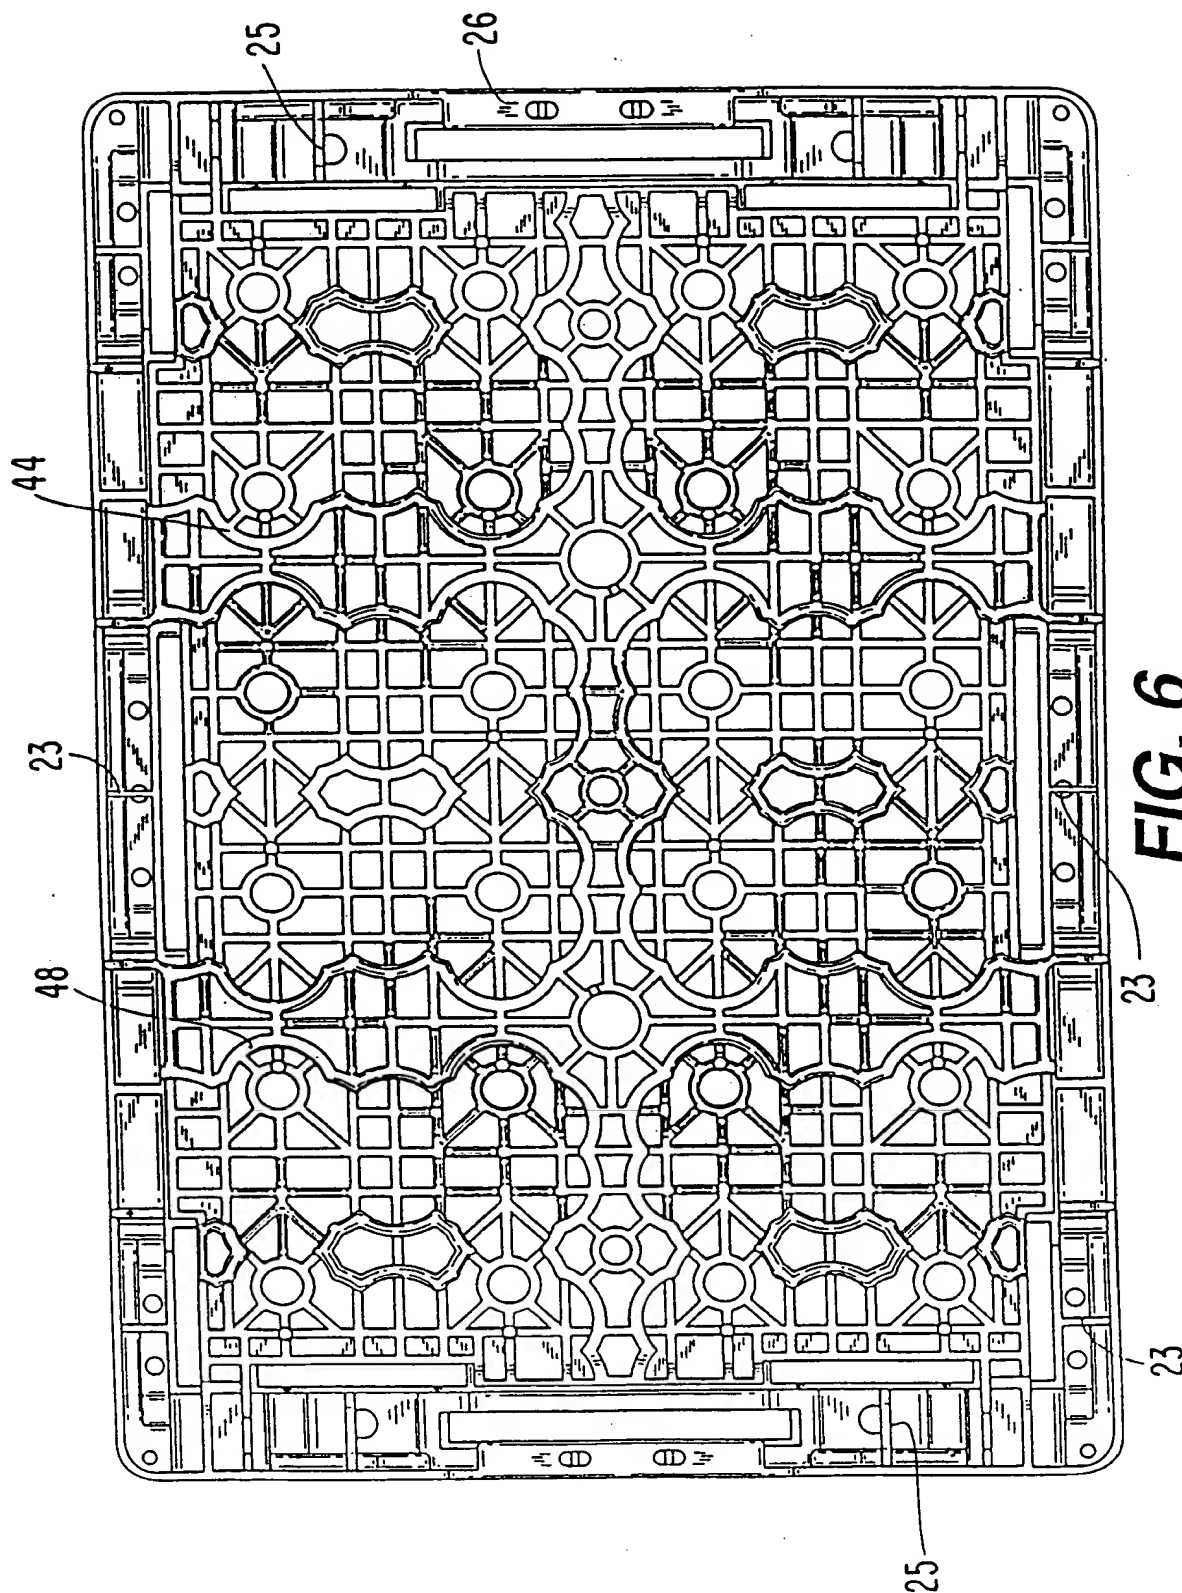


FIG. 6

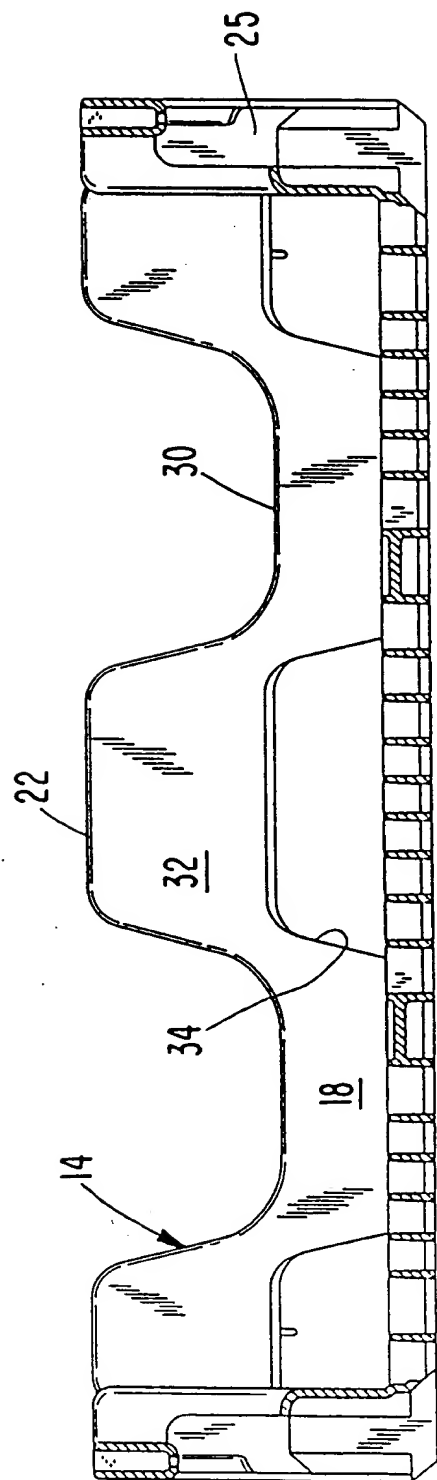


FIG. 8

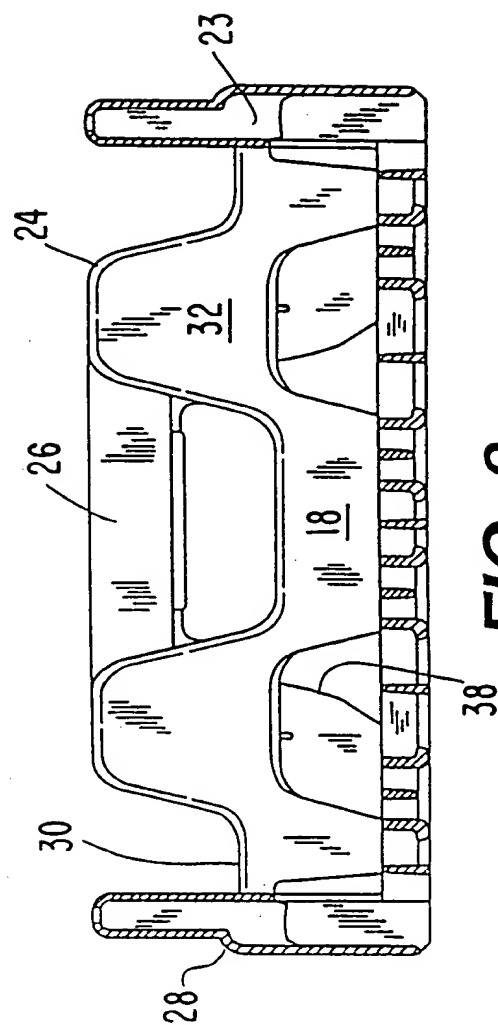


FIG. 9

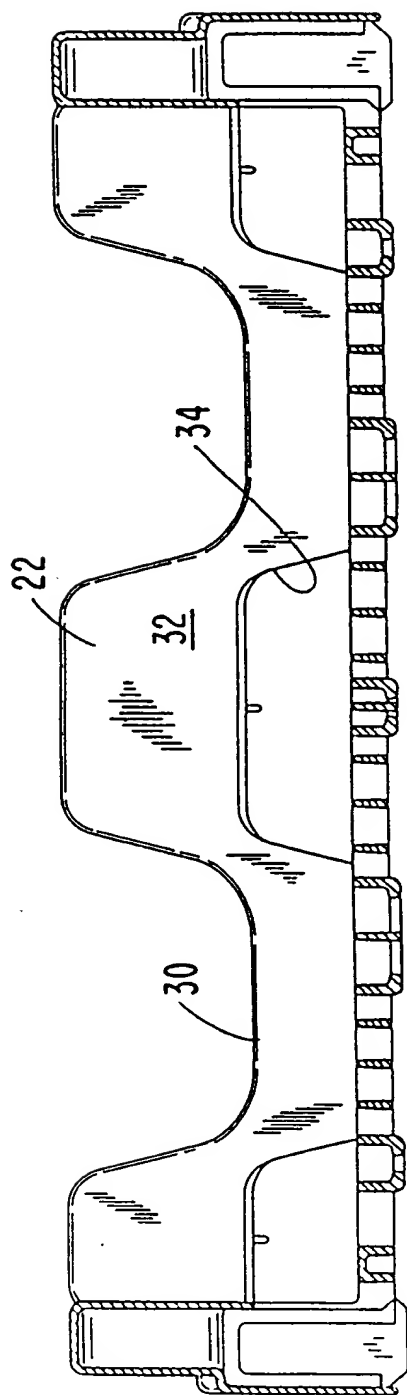


FIG. 10

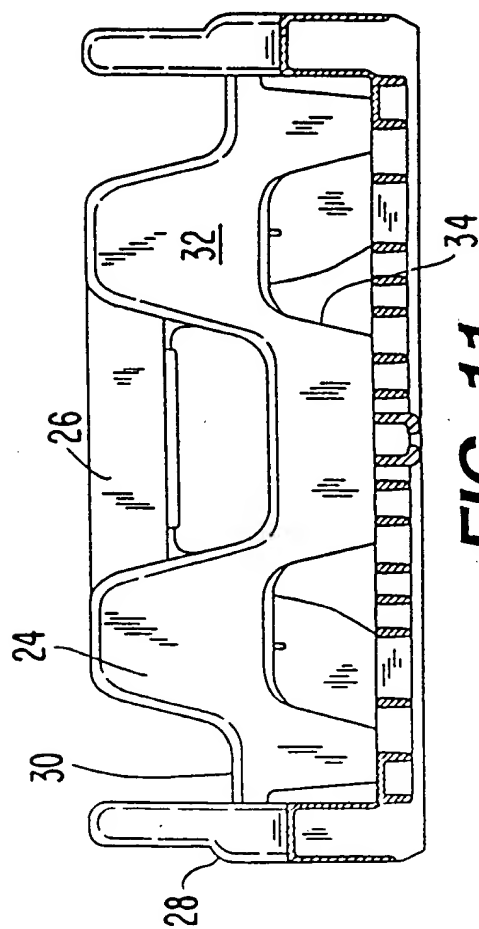


FIG. 11

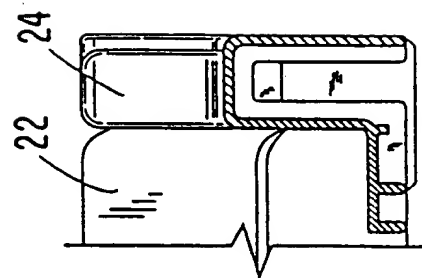


FIG. 12